




Bearing Insert

Eccentric Collar Series - Light Duty

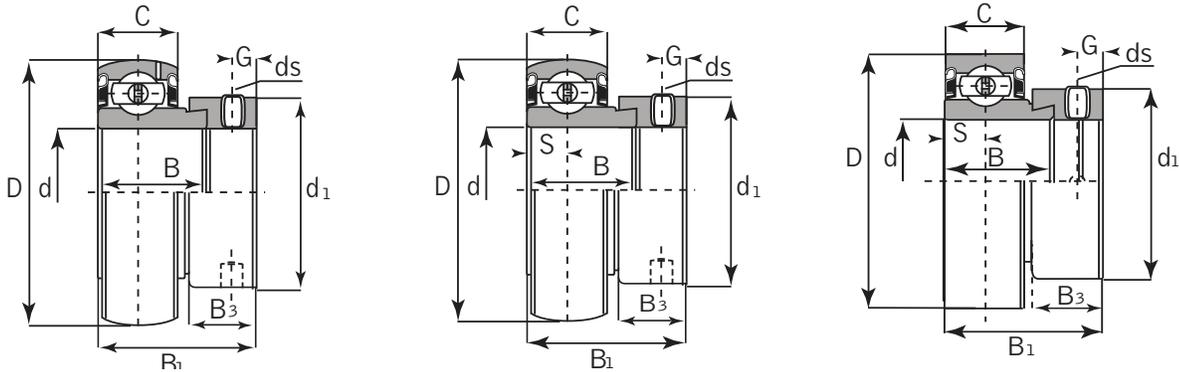

SA...G, SA & CSA

Unit No.	Shaft Dia. (inch / mm)	Dimensions (inch / mm)									Basic Load Rating lbf / N		Weight	
		d	D	d1	B	B1	B3	C	S	G	ds	Dynamic Cr	Static Cor	kg
CSA 104-12	3/4	1.6335 42	1.299 33	0.6354 16.14	1.0402 26.42	0.5197 13.2	0.4724 12	0.2362 6	0.1969 5	1/4-28 UNF M6 x 0.75	2109 9380	1124 5000	0.12	0.26
SA 201	12 mm												0.12	0.26
201-8	1/2												0.14	0.31
202	15 mm	1.5748 40	1.126 28.6	0.7520 19.1	1.126 28.6	0.5315 13.5	0.4724 12	0.2362 6	0.1969 5	1/4-28 UNF M6 x 0.75	2151 9570	1057 4700	0.11	0.24
202-10	5/8												0.13	0.29
203	17 mm												0.10	0.22
203-11	11/16												0.12	0.26
SA 204	20 mm	1.8504 47	1.311 33.3	0.8465 21.5	1.2165 30.9	0.5315 13.5	0.5512 14	0.2755 7	0.1969 5	1/4-28 UNF M6 x 0.75	2886 12840	1495 6650	0.16	0.35
204-12	3/4												0.15	0.33
SA 205	25 mm												0.21	0.46
205-14	7/8	2.0472 52	1.500 38.1	1.126 28.6	1.2402 31.5	0.5315 13.5	0.5905 15	0.2953 7.5	0.1969 5	1/4-28 UNF M6 x 0.75	3152 14020	1771 7880	0.19	0.42
205-15	15/16												0.18	0.40
205-16	1												0.18	0.40
SA 206	30 mm												0.30	0.66
206-18	1-1/8	2.4409 62	1.752 44.5	0.9370 23.8	1.4055 35.7	0.6260 15.9	0.6299 16	0.3150 8	0.2362 6	5/16-24 UNF M8 x 1	4375 19460	2542 11310	0.30	0.66
206-19	1-3/16												0.30	0.66
206-20	1-1/4												0.29	0.64
SA 207	35 mm												0.55	1.21
207-20	1-1/4	2.8346 72	2.189 55.6	1.000 25.4	1.5315 38.9	0.6890 17.5	0.6693 17	0.3346 8.5	0.2559 6.5	5/16-24 UNF M8 x 1	5771 25670	3439 15300	0.53	1.17
207-21	1-5/16												0.50	1.10
207-22	1-3/8												0.50	1.10
207-23	1-7/16												0.47	1.03
SA 208	40 mm	3.1496 80	2.374 60.3	1.1890 30.2	1.7204 43.7	0.7205 18.3	0.7087 18	0.3543 9	0.2559 6.5	5/16-24 UNF M8 x 1	29520 6636	18140 4078	0.63	1.39
208-24	1-1/2												0.67	1.47
208-25	1-9/16												0.65	1.43
SA 209	45 mm	3.3465 85	2.500 63.5	1.1890 30.2	1.7165 43.6	0.7205 18.3	0.7480 19	0.3740 9.5	0.2559 6.5	5/16-24 UNF M8 x 1.25	31670 7119	20680 4649	0.66	1.45
209-26	1-5/8												0.74	1.63
209-27	1-11/16												0.72	1.58
209-28	1-3/4												0.67	1.47

Add (G)suffix for regreasable. (ex. SA 205-16G)