

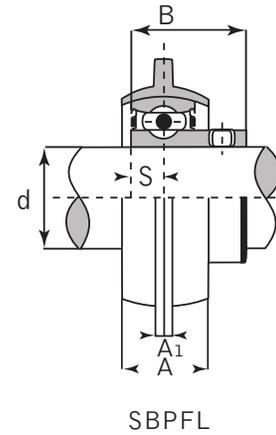


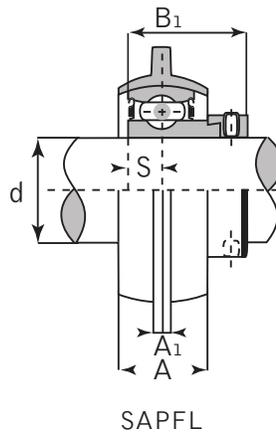

# Pressed Steel Unit

Light Duty

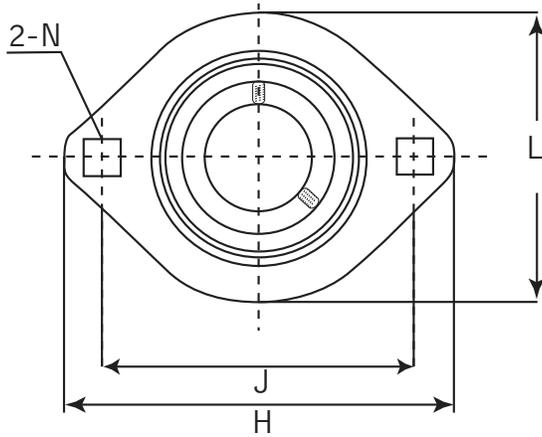

## SAPFL Eccentric Locking Collar SBPFL Set Screw Locking

Unit No. SAPFL SBPFL	Shaft Dia. (inch / mm)	Dimensions (inch / mm)						SAPFL		SBPFL		Bearing No. SA / SB	Housing No.	Weight		
		d	H	J	L	A	A1	N	B1	S	B			S	kg	lbs
201 201-8	12 mm 1/2												201 201-8	PFL 203	0.22	0.48
202 202-10	15 mm 5/8	3-3/16 <b>81</b>	2-1/2 <b>63.5</b>	2-5/16 <b>59</b>	9/16 <b>14</b>	5/32 <b>4</b>	17/64 <b>7.1</b>	1.1259 <b>28.6</b>	0.2559 <b>6.5</b>	0.8661 <b>22</b>	0.2362 <b>6</b>	202 202-10				
203	17 mm											203				
203-11	11/16											203-11				
204 204-12	20 mm 3/4	3-17/32 <b>90</b>	2-13/16 <b>71.5</b>	2-5/8 <b>67</b>	5/8 <b>16</b>	5/32 <b>4</b>	23/64 <b>9</b>	1.2204 <b>31</b>	0.2952 <b>7.5</b>	0.9842 <b>25</b>	0.2755 <b>7</b>	204 204-12	PFL 204			
205 205-14	25 mm 7/8	3-3/4	2-63/64	2-25/32	23/32	5/32	23/64	1.2204	0.2952	1.0629	0.2952	205 205-14	PFL 205	0.32	0.70	
205-15	15/16	<b>95</b>	<b>76</b>	<b>71</b>	<b>18</b>	<b>4</b>	<b>9</b>	<b>31</b>	<b>7.5</b>	<b>27</b>	<b>7.5</b>	205-15				
205-16	1											205-16				
206 206-18	30 mm 1-1/8	4-7/16	3-9/16	3-5/16	23/32	13/64	7/16	1.4055	0.3543	1.1811	0.3149	206 206-18	PFL 206	0.41	0.90	
206-19	1-3/16	<b>113</b>	<b>90.5</b>	<b>84</b>	<b>18</b>	<b>5.2</b>	<b>11</b>	<b>35.7</b>	<b>9</b>	<b>30</b>	<b>8</b>	206-19				
206-20	1-1/4											206-20				
207 207-20	35 mm 1-1/4	4-13/16	3-15/16	3-11/16	25/32	13/64	7/16	1.5314	0.3740	1.2598	0.3346	207 207-20	PFL 207	0.69	1.52	
207-21	1-5/16	<b>122</b>	<b>100</b>	<b>94</b>	<b>20</b>	<b>5.2</b>	<b>11</b>	<b>38.9</b>	<b>9.5</b>	<b>32</b>	<b>8.5</b>	207-21				
207-22	1-3/8											207-22				
207-23	1-7/16											207-23				
208 208-24	40 mm 1-1/2	5-13/16	4-11/16	3-15/16	13/16	17/64	17/32	1.7204	0.4330	1.3385	0.3543	208 208-24	PFL 208	0.83	1.83	
208-25	1-9/16	<b>148</b>	<b>119</b>	<b>100</b>	<b>21</b>	<b>6.8</b>	<b>13.5</b>	<b>43.7</b>	<b>11</b>	<b>34</b>	<b>9</b>	208-25				